


RFG

ROLL-UP FLOOR GRILLE

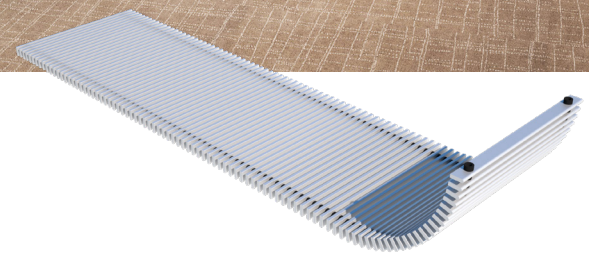


RFG

Roll-Up Floor Grille


The Roll-Up Floor Grille (RFG) is a strong, durable floor grille that is specifically designed for underfloor applications. This grille can be used in conjunction with various Price underfloor plenums and terminal units.

The RFG is designed as an efficient air supply product which maximizes free area while maintaining superior strength. The bars are held together with corrosion resistant springs and lay perpendicular to the long dimension allowing for an easy drop in installation.

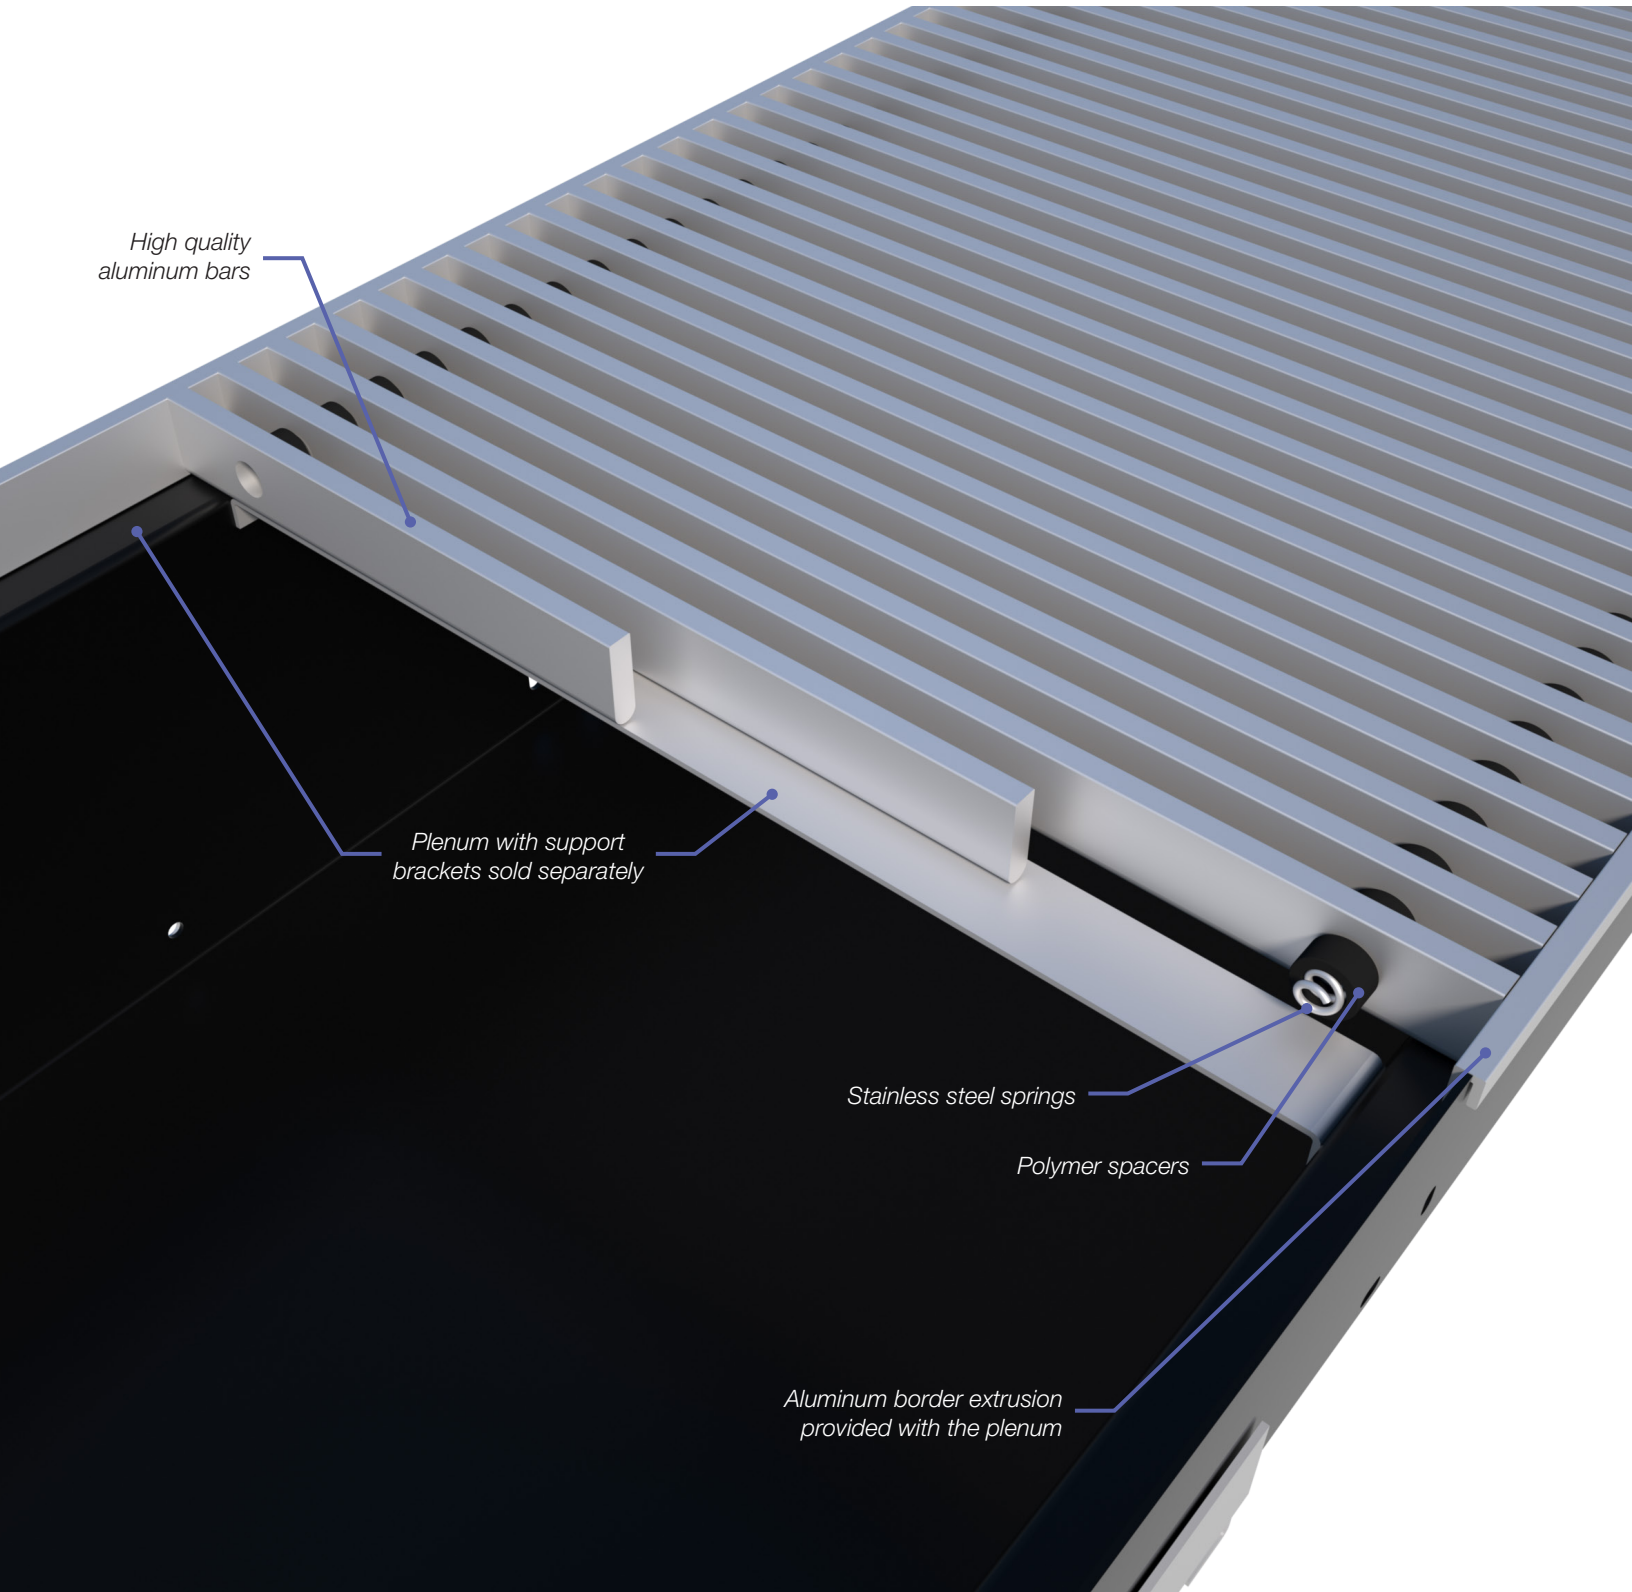

DESIGNED FOR FLOOR INSTALLATION

- + With different end connections the Roll-Up Floor Grille can be installed in long, continuous lengths. Connections can be aligned when multiple sections are required.
- + The RFG is used in combination with various floor plenum configurations including:
 - Linear Fan Terminal (LFT)
 - Ducted fan supply (LFP)*
 - Recirculating natural convection floor terminals (LNT)*
 - Changeover plenum combining ducted and VAV plenums (LPT-HC)*

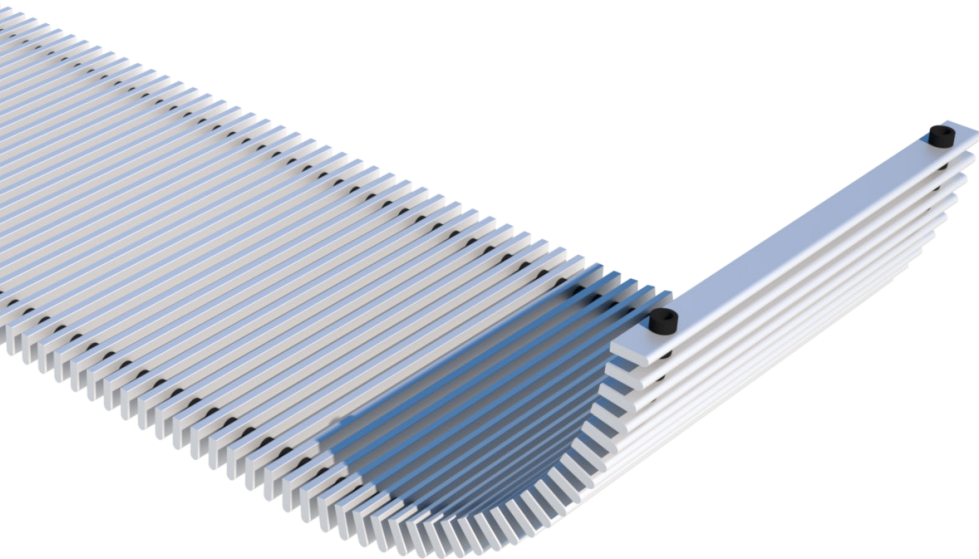

TYPICAL APPLICATIONS

RFG's handle light foot traffic and do not intrude on wall space. Constructed with high quality aluminum bars, stainless steel springs, and corrosion resistant polymer spacers. This makes them well suited for offices, lobbies, schools and universities with raised floor or trench systems along the perimeter.

FEATURES


- + Easy Install
- + Grille Length
 - 12" - 72"
- + Grille Width
 - 6" - 14"
- + Corrosions Resistant Spacers
 - UL94 and UV Stabilized
- + Various finish options
 - Raw Aluminum
 - Prepared Aluminum
 - Anodized Black
 - Anodized Clear
 - Anodized Light Bronze
 - Anodized Medium Bronze
 - Anodized Dark Bronze
 - Various Powder Coats

*Specials only


DIMENSIONAL DATA

RFG is available in multiple size options, reference submittal package for sizes.

End Condition

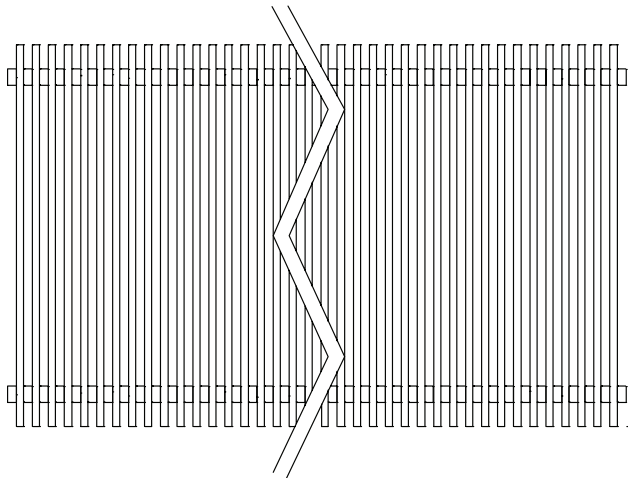


XX - Spacers both ends

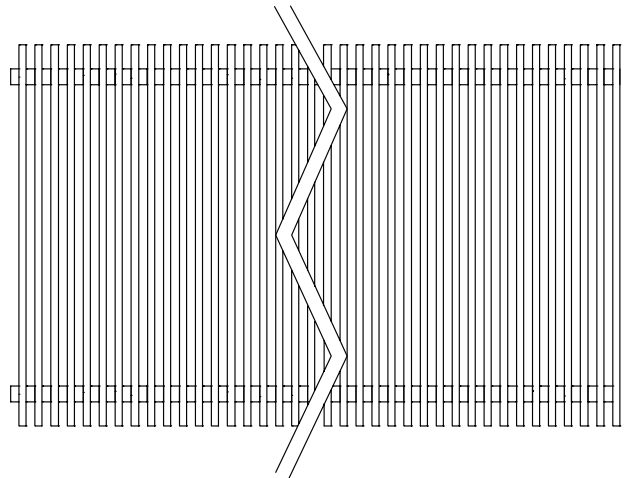

XY - Spacer on one end

Grille Spacing

25C - 3/16" (5) BARS

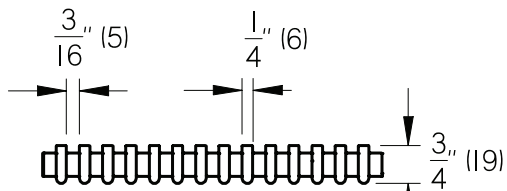

0° DEFLECTION

1/4" Spacing



Product Improvement is a continuing endeavour at Price. Therefore, specifications are subject to change without notice. Consult your Price Sales Representative for current specifications or more detailed information. Not all products may be available in all geographic areas. All goods described in this document are warranted as described in the Limited Warranty shown at priceindustries.com. The complete Price product catalog can be viewed online at priceindustries.com.